

MODELING OF STRAIGHT-LINE DRIVING WITH A GUIDANCE AID FOR A TRACTOR-DRIVING SIMULATOR

D. Karimi, D. D. Mann, R. Ehsani

ABSTRACT. *Minor steering corrections are necessary to keep a tractor moving in a straight line. If the factors that cause such steering corrections are not considered in the implementation of a driving simulator, the task of straight-line driving will be both unrealistic and too simple. The objective of this study was to develop and validate a model, for simulation of parallel swathing in a tractor-driving simulator, which accounts for both guidance system error and tractor self-deviation. Guidance system error and tractor self-deviation were both measured by an RTK GPS system. Fourier analysis was used to determine the energy spectrum in high-, medium-, and low-frequency regions. Complex sinusoids which had similar energy distributions to those obtained from field measurements were proposed for both guidance system error and tractor self-deviation. To validate the straight-line driving model, root mean square (RMS) and frequency composition of lateral deviation of the vehicle were determined for both the tractor-driving simulator and several real systems consisting of a tractor, driver, and lightbar guidance device. Six subjects participated in the simulator study. On average, the RMS of lateral deviation was 33 cm. The energy distribution was 32% in the high-frequency region, 39% in the medium-frequency region, and 29% in the low-frequency region. Field experiments with a single driver with seven distinct lightbar guidance systems yielded an average RMS of lateral deviation of 15 cm. The energy distribution was 27% in the high-frequency region, 41% in the medium-frequency region, and 32% in the low-frequency region. Field experiments with seven drivers using a single lightbar guidance device yielded an average RMS of lateral deviation of 30 cm. The energy distribution was 30% in the high-frequency region, 40% in the medium-frequency region, and 30% in the low-frequency region. Field experiments showed close agreement with simulator experiments in terms of the frequency composition of the lateral deviations.*

Keywords. *Parallel swathing, Straight-line driving, Tractor lateral deviations, Tractor-driving simulator, Lightbar guidance system.*

Driving simulators date back to the 1970s when General Motors developed one of the first driving simulators (Gruening et al., 1998). Today, driving simulators are being used as effective research tools in several areas including vehicle system development and human factors studies. They enable researchers to reproduce real driving situations in a safe and easily controllable environment (Lee et al., 1998). Rapid increases in the computational power and graphic capabilities of desktop computers over the last decade have enabled researchers to build high fidelity driving simulators at reasonably low cost. Although driving simulators have been extensively used in the automotive industry for many years, only a small number of driving simulators have been developed for agricultural vehicles; the work by Wilkerson et al. (1993) is one of the few examples.

Most field operations are performed in parallel swathing mode which consists of driving the agricultural vehicle along a series of parallel paths to cover the entire field. Although the desired path might be a straight line, the driver has to constantly make steering adjustments to keep the tractor on target due to unevenness of the field surface and imperfections in both the vehicle and the guidance system. A good tractor-driving simulator must provide a realistic replication of straight-line driving. For straight-line driving on a simulator to be realistic, the simulator must account for the factors that contribute to deviations of the tractor from the desired straight line. The nature of these factors must be described in mathematical terms.

In some ways, automobiles are similar to tractors because imperfections that contribute to lateral deviations exist in both systems. Standard Deviation of Lateral Lane Deviations (SDLLD) has been used to compare the performance of automobile-driving simulators to actual automobile driving (Allen et al., 1994). It is common for SDLLD to be smaller for simulator driving than for automobile driving, possibly because automobile-driving simulators do not consider the minor imperfections that exist in real driving conditions (Green, 2005). To prevent this problem, Green (2005) suggested introducing some disturbance to cause the simulated vehicle to deviate from the straight path.

Despite the similarities between a tractor and an automobile, the nature of disturbances is quite different due to different driving surfaces and forward speeds. Furthermore, tractor operators often use a guidance system to achieve higher straight-line driving accuracy. The interaction

Submitted for review in September 2007 as manuscript number PM 7204; approved for publication by the Power & Machinery Division of ASABE in April 2008.

The authors are **Davood Karimi**, Graduate Student, **Danny D. Mann**, ASABE Member Engineer, Professor, Department of Biosystems Engineering, University of Manitoba, Winnipeg, MB, Canada; and **Reza Ehsani**, ASABE Member, Assistant Professor, Citrus Research and Education Center, University of Florida, Lake Alfred, Florida. **Corresponding author:** Danny D. Mann, Department of Biosystems Engineering, E2-376 EITC, University of Manitoba, Winnipeg, MB Canada, R3T 5V6; phone: 204-474-7149; fax: 204-474-7512; e-mail: Danny_Mann@UManitoba.Ca.

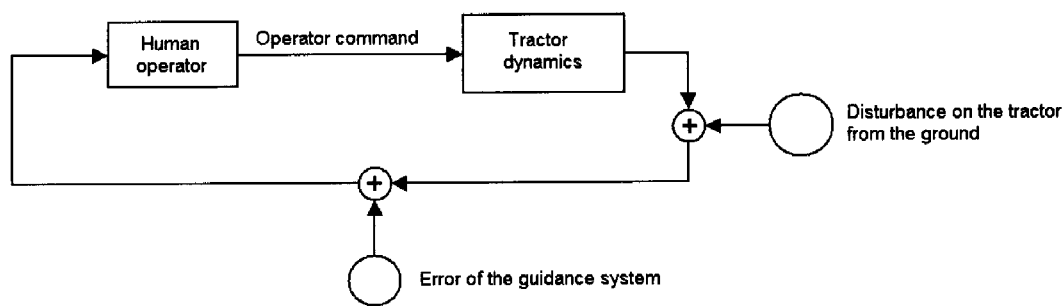


Figure 1. Block diagram representation of driving in parallel swathing mode.

between the driver, the tractor, and the guidance system in straight-line driving can be illustrated by a simplified block diagram (fig. 1). Motion of the tractor is a superposition of the movements due to steering commands and the disturbance from the ground surface. The guidance system has its own error. Proper simulation of the straight line driving requires an understanding of both the disturbances on the vehicle and the guidance system error.

The objective of this study was to develop and validate a model for simulation of parallel swathing in a tractor-driving simulator that accounts for both guidance system error and tractor self-deviation.

PROCEDURE FOR MODEL DEVELOPMENT AND VALIDATION

The first step in developing the straight-line driving model was to determine mathematical descriptions of guidance system error and tractor self-deviation. After modifying the code of the tractor-driving simulator, experiments were completed with the simulator. Root mean square (RMS) and frequency composition of lateral deviation of the vehicle were determined. Field experiments were also completed using tractors driven through agricultural fields in response to guidance information provided by lightbar navigation devices. Root mean square (RMS) and frequency composition of lateral deviation of the vehicle were determined. Comparison of the data obtained with actual vehicles to the data obtained with the tractor-driving simulator was used to determine the validity of the straight-line driving model.

DATA ANALYSIS PROCEDURES

The raw data collected in this study were position data of either the real vehicle or the simulated vehicle. These position data were analyzed by first calculating the deviation from the desired straight line (i.e., cross track error) for each pass. Then, Fourier analysis was performed to obtain the frequency composition of these deviations. Discrete Fourier analysis requires data points to be equally-spaced. Because this was not the case for the data, a spline curve was first fitted to the data points. The number of pieces of the spline was increased until the spline passed through all data points, eliminating fitting error. Figure 2 shows an example of the error data and the fitted spline curve.

Next, a continuous-time Fourier transform was applied to the spline curve $y(x)$ (Oppenheim et al., 1997):

$$Y(j\omega) = \int_{-\infty}^{+\infty} y(x) e^{-j\omega x} dx \quad (1)$$

where

- x = distance along the path
- $y(x)$ = driving error at position x
- $Y(j\omega)$ = value of Fourier transform for frequency equal to ω
- ω = frequency, here ω is 'positional frequency'; since x is distance (m), the dimension of ω is 1/distance (i.e., L^{-1}).

An example of the resulting spectrum is shown in figure 3.

The horizontal axis is in the period, T , instead of the frequency, ω , because it is easier to interpret. In fact, T is twice the distance traveled during each excursion for the specific harmonic. T is in units of m and is related to ω through the following equation:

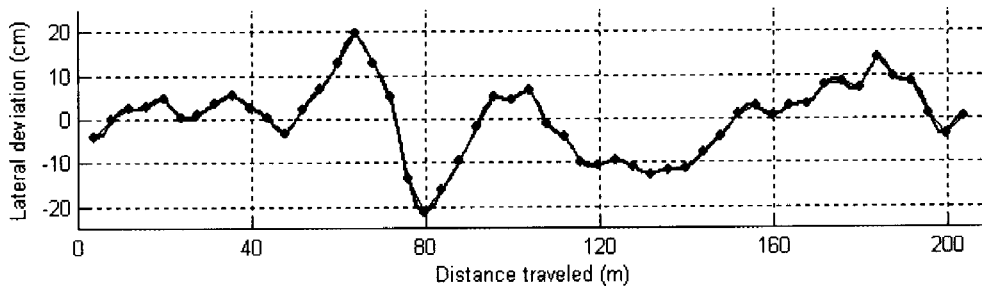


Figure 2. A sample plot of the error of the lightbar guidance system (small solid circles) and a spline curve fitted to these points.

